

ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

No
Picture
Available

General

| | | | | |
|---------------------|-----------|---------------|------------------------|-----------------------|
| Built | July-1993 | International | GT 14,061.00 | NT 6,900.00 |
| Flag | Bahamas | Panama Canal | | 11,480.00 |
| Port of Registry | Nassau | Suez Canal | | 11,792.30 |
| Callsign | C6LU3 | | | |
| IMO/Lloyds nr | 9059602 | | Draft | DWAT |
| Length over all [m] | 179.90 | Tropical | 9.22 | 14,140 |
| Beam [m] | 25.20 | Summer | 9.22 | 14,140 |
| Depth [m] | 13.20 | Winter | 9.22 | 14,140 |
| Bowthruster(s) | - | | | |

Reefer

| | |
|--|--|
| Holds | 4 |
| Hatches | 4 |
| Compartments | 15 |
| Minimum Deckheight [m] | 2.29 (excl local areas) |
| Allowable weight of forklift including cargo | maximum 7 mt (Forklift to be equipped with minimum 4 non hard rubber airtyres) |
| Temperature zones | 8 |
| Cooling sections | 1A 1BC 2AB 2CD 3AB 3CD 4AB 4CD |
| Temperature range [dC] | -29/+15 |
| Air circulations [/hr] | 90/45/30 |
| Air renewals [/hr] | 2 |
| USDA equipped | Yes, valid until 01-November-2023 |
| Controlled Atmosphere | CA pre-piped |
| Modified Atmosphere | No equipment on board |

Classification Details

| | |
|------------------------|--|
| Classification Society | Lloyd'S Register (LR) |
| Classification | +100A1 |
| Hull Notation | refrigerated cargo/container vessel, cargo loading on tween deck plating limited to 1.8 mt/sqm |
| Machinery Notation | +LMC, UMS, +Lloyds RMC |



ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

Reefer Compartment Capacity Breakdown

| | Hold 1 | | Hold 2 | | Hold 3 | | Hold 4 | | Total | |
|--------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|
| | Cbft | Sqm | Cbft | Sqm | Cbft | Sqm | Cbft | Sqm | Cbft | Sqm |
| A | 53,042 | 578.00 | 53,431 | 594.00 | 50,182 | 559.00 | 50,358 | 557.00 | 207,013 | 2,288.00 |
| B | 33,902 | 395.00 | 44,814 | 548.00 | 46,333 | 563.00 | 46,404 | 560.00 | 171,453 | 2,066.00 |
| C | 21,507 | 263.00 | 39,305 | 478.00 | 46,651 | 564.00 | 43,472 | 528.00 | 150,935 | 1,833.00 |
| D | | | 29,770 | 355.00 | 35,986 | 438.00 | 27,475 | 337.00 | 93,231 | 1,130.00 |
| Total | 108,451 | 1,236.00 | 167,320 | 1,975.00 | 179,152 | 2,124.00 | 167,709 | 1,982.00 | 622,632 | 7,317.00 |

Hold 1- 4 Legend

Non insulated Deck, air passes through (aka Spar Deck)

Insulated, air tight Deck or Tanktop

Non Insulated, air tight Deck

Hatch sizes

| | Hold 1 | Hold 2 | Hold 3 | Hold 4 |
|------|---------------|---------------|---------------|---------------|
| | l x b | l x b | l x b | l x b |
| Deck | 13.70 x 10.80 | 13.70 x 10.80 | 13.70 x 10.80 | 13.70 x 10.80 |
| A | | - | | |
| B | | - | | |
| C | | - | | |

| Container Carrying Capacity | Max FEU's | Add. TEU's | Max TEU's | Add. FEU's | |
|------------------------------------|-----------|------------|-----------|------------|---|
| <u>On Weather Deck and Hatches</u> | | | | | |
| Empty Positions | Standard | 157 | 10 | 324 | 0 |
| Max Stackweight | Standard | 156 | 10 | 322 | 0 |
| Max Stackweight - Self-sustained | Standard | 156 | 10 | 322 | 0 |
| Empty Positions | High Cube | 157 | 10 | 324 | 0 |
| Max Stackweight | High Cube | 156 | 10 | 322 | 0 |
| Max Stackweight - Self-sustained | High Cube | 156 | 10 | 322 | 0 |
| <u>Reefer Hold</u> | | | | | |
| Empty Positions | Standard | 56 | 0 | 112 | 0 |
| Max Stackweight | Standard | 56 | 0 | 112 | 0 |
| Max Stackweight - Self-sustained | Standard | 56 | 0 | 112 | 0 |
| Empty Positions | High Cube | 40 | 0 | 80 | 0 |
| Max Stackweight | High Cube | 40 | 0 | 80 | 0 |
| Max Stackweight - Self-sustained | High Cube | 40 | 0 | 80 | 0 |

'Max Stackweight' and 'Max Stackweight - Self-sustained' are the number of laden containers that can be loaded basis the maximum stackweight, calculating 26 mt gross for a laden FEU and 14 mt gross for a laden TEU

Above figures are as per vessel's technical layout. Actual container intake is subject to master's approval and depending on stability, stackweight and visibility.



ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

Standard Voyage Container Carrying Capacity

| | |
|--------------------------------|---|
| Nr of High Cube (9.5') Reefers | 0 |
| of which Selfsustained | 0 |

'Standard Voyage' = voyage from Panama Canal to Rotterdam, with a full cargo of bananas in the holds and departing with full bunker tanks. Containers on this voyage are considered to weigh 26 mt gross.

Reefer Plugs

| | |
|--------------------------------|-----|
| Nr. of electrical Reefer Plugs | 162 |
|--------------------------------|-----|

Cargo Gear

3 Cranes x 40.0 mt or 8.0 mt in high speed modus
4 Cranes x 10.0 mt



ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

Speed & Consumption

| Ballast | | | | Draft condition | Forward: 6.50 | Aft: 6.50 |
|--|------------------------------------|---------------------|----------------------|------------------------|------------------------------|--------------------------|
| <u>Speed</u> | <u>ME HFO</u> | <u>ME MGO</u> | <u>Slow Steaming</u> | | | |
| 17.00 | 31.00 | 0.00 | No | | | |
| 20.00 | 45.00 | 0.00 | No | | | |
| Ave. aux. cons. excl. reefer containers | | | | | | |
| | <u>A/E's</u> | <u>Boiler</u> | | | | |
| HFO | 4.00 | 0.00 | | | | |
| MGO | 0.00 | 0.00 | | | | |
| Banana Laden | | | | Draft condition | Forward: 6.50 - 8.50 | Aft: 6.50 - 8.50 |
| <u>Speed</u> | <u>ME HFO</u> | <u>ME MGO</u> | <u>Slow Steaming</u> | | | |
| 17.00 | 35.00 | 0.00 | No | | | |
| 20.00 | 50.50 | 0.00 | No | | | |
| Ave. aux. cons. excl. reefer containers | | | | | | |
| | <u>A/E's</u> | <u>Boiler</u> | | | | |
| HFO | 9.00 | 0.00 | | | | |
| MGO | 0.00 | 0.00 | | | | |
| Banana Laden + Containers | | | | Draft condition | Forward: 8.50 - 10.00 | Aft: 8.50 - 10.00 |
| <u>Speed</u> | <u>ME HFO</u> | <u>ME MGO</u> | <u>Slow Steaming</u> | | | |
| 17.00 | 37.50 | 0.00 | No | | | |
| 20.00 | 54.00 | 0.00 | No | | | |
| Ave. aux. cons. excl. reefer containers | | | | | | |
| | <u>A/E's</u> | <u>Boiler</u> | | | | |
| HFO | 9.00 | 0.00 | | | | |
| MGO | 0.00 | 0.00 | | | | |
| General Cargo | | | | Draft condition | Forward: 6.50 - 8.50 | Aft: 6.50 - 8.50 |
| <u>Speed</u> | <u>ME HFO</u> | <u>ME MGO</u> | <u>Slow Steaming</u> | | | |
| 17.00 | 35.00 | 0.00 | No | | | |
| 20.00 | 50.50 | 0.00 | No | | | |
| Ave. aux. cons. excl. reefer containers | | | | | | |
| | <u>A/E's</u> | <u>Boiler</u> | | | | |
| HFO | 4.00 | 0.00 | | | | |
| MGO | 0.00 | 0.00 | | | | |
| In Port | | | | | | |
| | Ave. aux. cons. excl. cargo | Reefer Plant | | | | |
| | <u>A/E's</u> | <u>Boiler</u> | | <u>A/E's</u> | | |
| HFO | 8.00 | 1.50 | + | 0.00 | | |
| MGO | 0.00 | 0.00 | | 0.00 | | |



ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

- All speeds are 'about', all consumptions are 'about', basis clean hull, clean propeller and deep (minimum 7 x deepest draft), currentless water/sea with a temperature of maximum 28 degree Celcius.
- Descriptions are given basis maximum Beaufort 4, maximum 2 meters combined swell and wave height.
- Additional MGO may be used for starting/stopping engines and/or manouvring and/or in narrow and/or restricted waters and/or in extreme weather conditions.
- All auxiliary consumptions are based on maintaining cargo temperatures, during reduction period higher consumptions may be recorded.
- All descriptions exclude consumption for carried laden reefer containers. Depending on ao the make and/or type of container, maintenance state of the container, commodity in the container, ambient temperature, use of water cooling, stowage position: as indication an average additional fuel consumption of about 30 kg/container/24hrs when maintaining temperatures to be taken into account.
- Port consumptions are averages for vessel lying alongside berth. Manoeuvring consumptions are excluded.
- Auxiliary consumption up to 29 mt/day with all generators fully loaded.
- All Speeds are in knots and all consumptions are in metric tons per 24 hours.
- International and/or local regulations, such as but not limited to ECA's, may require use of other fuel grades than specified.
- Conditions are based on sailing with even keel, unless stated otherwise. Significant trim, especially large negative trim, may have negative impact on the performance.
- All consumption figures are based on ISO 8217 (latest revision) specification fuels with following minimum caloric values:
HFO: 40.600 kJ/kg
MGO 42.700 kJ/kg

Bunker Tank Capacities

| | <u>Cbm (100%)</u> | <u>Cbm at max filling level*</u> | <u>mt**</u> |
|--|-------------------|----------------------------------|--------------|
| Overflow/Settling/Daytanks for RMG380 (IFO380) | 0 | 0 | 1,870 |
| Total bunker capacity for RMG380 (IFO380) | 0 | 0 | 1,870 |
| Overflow/Settling/Daytanks for DMB (MDO) | 0 | 0 | 165 |
| Total bunker capacity for DMB (MDO) | 0 | 0 | 165 |

*) Vessel shall not mix bunkers from different bunkerings in 1 bunker tank. This may reduce the actual bunker capacity.

**) Capacity in mt serve as indication only. Actual capacity in mt depending ao on the specifice gravity and temperature of the supplied bunkers.

Vessel to be solely supplied with fuels as per ISO 8217:2010 or any subsequent amendment thereof. All supplied fuels shall be suitable to enable main propulsion and auxiliary machinery to operate efficiently and without harmful effects and in line with any national and/or international requirements. Fuels to be mineral based products and shall not contain waste lubricants (ULO), chemicals or any other harmful substances and shall be of homogenous and stable nature. Charterers to buy and arrange bunkers only from qualified suppliers and/or from majors and carry out their own quality checks as deemed necessary for their control.

Charterers warrant that whenever bunkers are ordered for the vessel, the order not to put a lien on the vessel and explicitly request "The Products shall not include waste chemicals, waste lubricants and/or other non-fuel components."

BIMCO Bunker Fuel Sulphur Content clause for Time Charter parties 2004 to apply.

If vessel is redelivered in an ECA area, Charterers warrant that vessel will be redelivered with sufficient bunkers suitable for consumption as per the requirements of the relevant ECA area to reach a port or place where suitable bunkers may be supplied.

Vessel participates in fuel testing program. Samples are taken during each fuel from each supplied grade. Costs involved to be equally shared between Owners and Charterers. Vessel shall not consume any supplied fuel without having received full fuel analysis report confirming the fuel's quality.

It is Charterers obligation to make sure that fuels with sulphur content higher than 0.5% are either consumed or removed from the vessel at his cost prior 01 January 2020.




ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

Communication Details

| Communication type | System | Communication number / Comments |
|--------------------|----------|---|
| Mail | E-Mail | albemarle@albemarle.trireme.commbox.com |
| Phone | Iridium | +881 677 778 508 |
| Phone | Iridium | +881 677 778 509 |
| Phone | Vsat | +32 3 808 55 16 |
| Telex | Satcom-C | +580 430 851 112 |
| Telex | Satcom-C | +580 430 851 110 |
| Telex | Satcom-C | +580 430 851 111 |

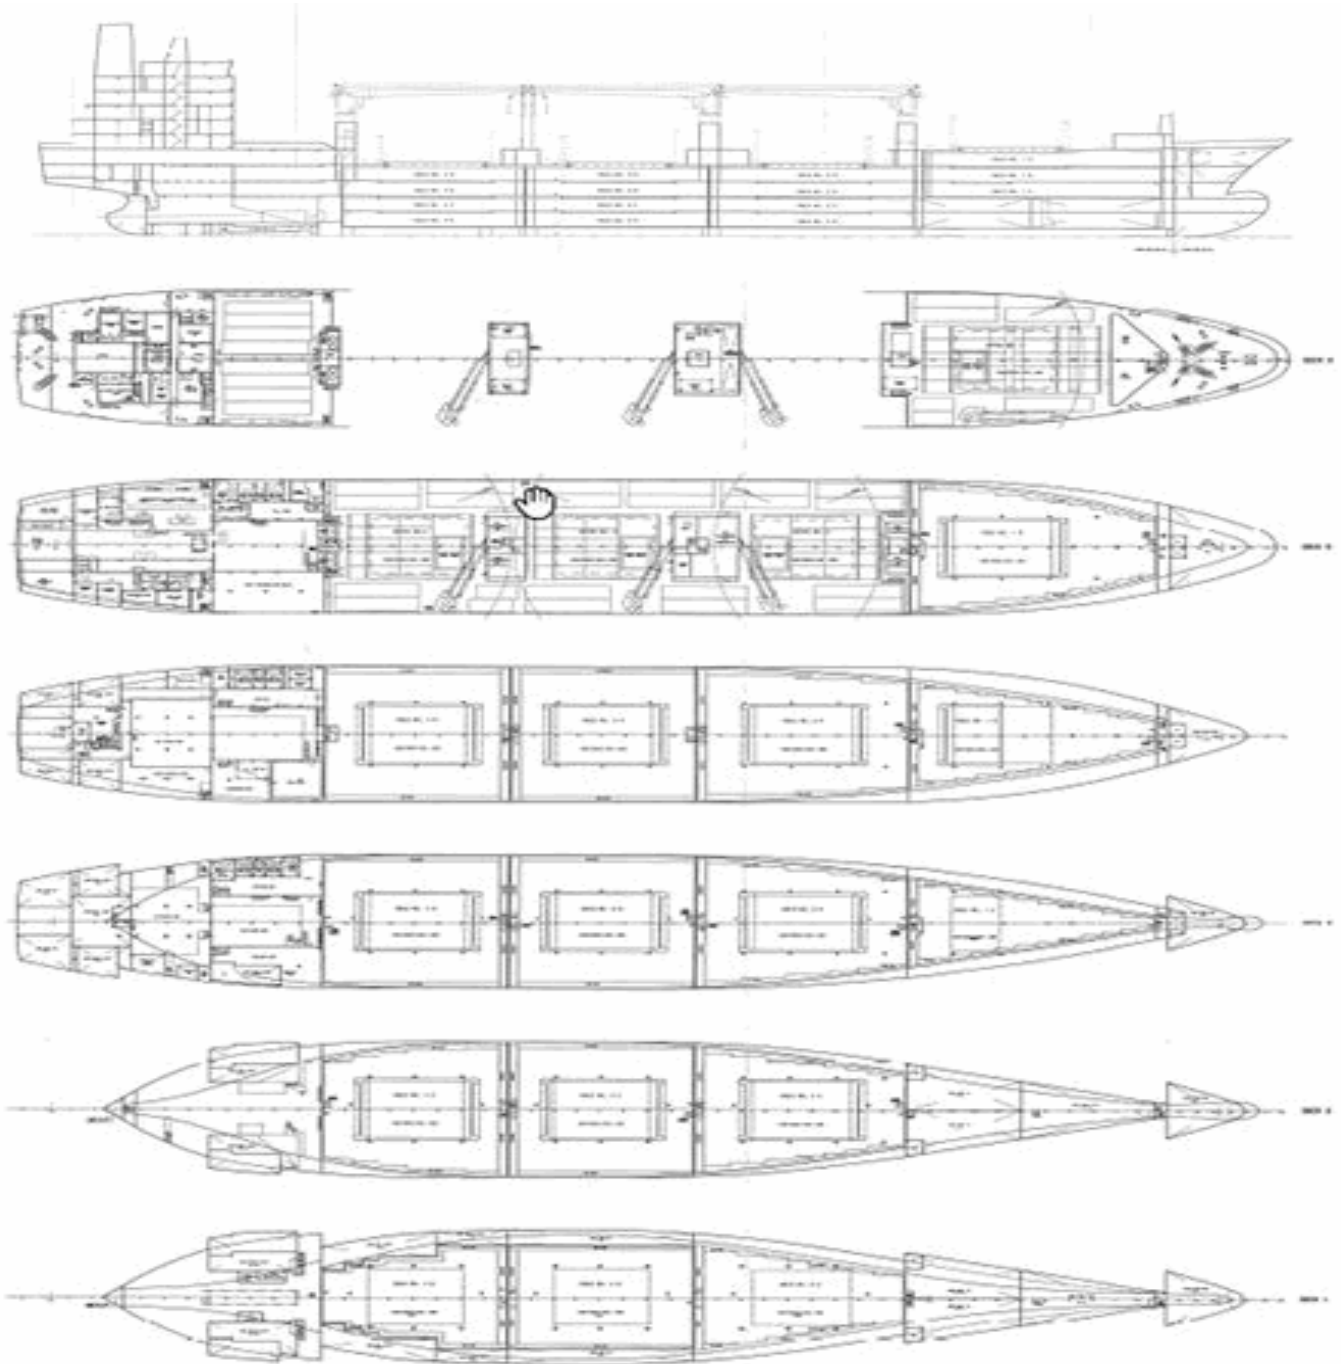

ALBEMARLE ISLAND

622,632 cbft / 7,317 sqm / 14,140 mt DWAT

General Remarks

- Pallet Intake figures are indication only. The figures are based on a stowage factor of 1.32 pallet/sqm in reefer holds, full load of reefer containers based on the standard voyage with 20 pallets in each container

